




ACME CONSULTING
 1234 Anystreet
 Somewhere, Someplace
 Telephone: 534 123 4567
 Fax: 534 321 4567

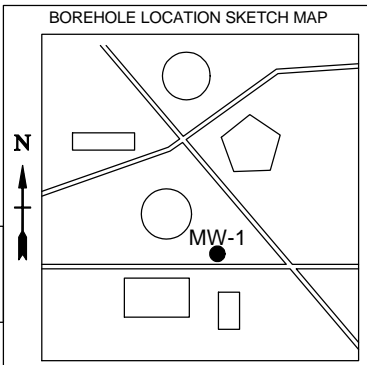

Page 1 of 2

WELL CONSTRUCTION LOG

BOREHOLE NUMBER MW-1		LOCATION 123 Main Street	
PROJECT NUMBER / NAME ABC-123 / gINT Example		APPROVED BY I.C. Moore	
DRILLING CONTRACTOR / DRILLER AAAAA Drilling / I. Core		LOGGED BY A. Bore	
DRILLING EQUIPMENT / METHOD ACME Z-99 / Hollow Stem Auger		BIT SIZE / BIT TYPE 8 in. / Auger	SAMPLING METHOD SS 2 in. O.D.
CASING MATL. / DIAMETER Sch. 40 PVC/4 in.		SCREEN: TYPE Slotted MATL. PVC	TOTAL LENGTH 23 DIA. 4 in. SLOT SIZE 0.02 in.
ELEVATION OF: GROUND SURFACE 123.4		TOP OF WELL CASING 124.5	TOP & BOTTOM SCREEN 108.4 / 74.4 GW SURFACE 94.4 DATE 6/25/98

3 ft. Dia. Steel Monument Box w/Lock	2 in. Dia. Locking Test Well Plug	Graphic Log	Visual Description	Depth (feet)	Sample Number	OVA Values (ppm)
--------------------------------------	-----------------------------------	-------------	--------------------	--------------	---------------	------------------

CEMENT	LEAN CLAY(CL) firm, low to moderate plasticity, gray, dry			
NO. 3 MONTEREY SAND		5	1	800	
CEMENT / BENTONITE GROUT	SANDY LEAN CLAY(CL) stiff, moderate plasticity, fine to medium sand, gray and brown mottled, moist	10	2	1000+	
BENTONITE SEAL					
2-INCH DIAMETER SCH 40 BLANK PVC CASING	with some fine gravel	15		No sample	
PRODUCT LEVEL 6/21/98					
2-INCH DIAMETER SCH 40 SLOTTED PVC CASING (0.02 in. SLOT)	SANDY POORLY GRADED GRAVEL(GP) medium dense to dense, fine to coarse gravel, fine to medium sand, gray, wet to saturated	20	3	700	
PRODUCT LEVEL 6/25/98					
2-INCH DIAMETER SCH 40 SLOTTED PVC CASING (0.02 in. SLOT)		25	4	600	
GROUND WATER LEVEL 6/25/98	SANDY SILT(ML) stiff to very stiff, low plasticity, fine sand, tan	30	5	750	
GROUND WATER LEVEL 6/22/98					
THREADED BOTTOM CAP	SILTY SAND(SM) dense, fine to medium, non-plastic, tan	35			

LOG A EWINN08 LOG A EWINN08.GPJ LOG A EWINN08.GDT 8/6/03