| gINT Example | DRILLING CO.: AAAAA Drilling Ltd | BOREHOLE NO: B-1 |
|---|---|---|
| ASSET MANAGEMENT AND PUBLIC WORKS | UTM ZONE: - N255 E65 | PROJECT NO: 1234567 |
| START DATE: 00/8/24 | 987+65+43 NAD 89 | ELEVATION: 123.456 m |

SAMPLE TYPE: Shelby Tube | Drive Sample | Auger Sample | No Recovery | A-Casing | Cored Sample

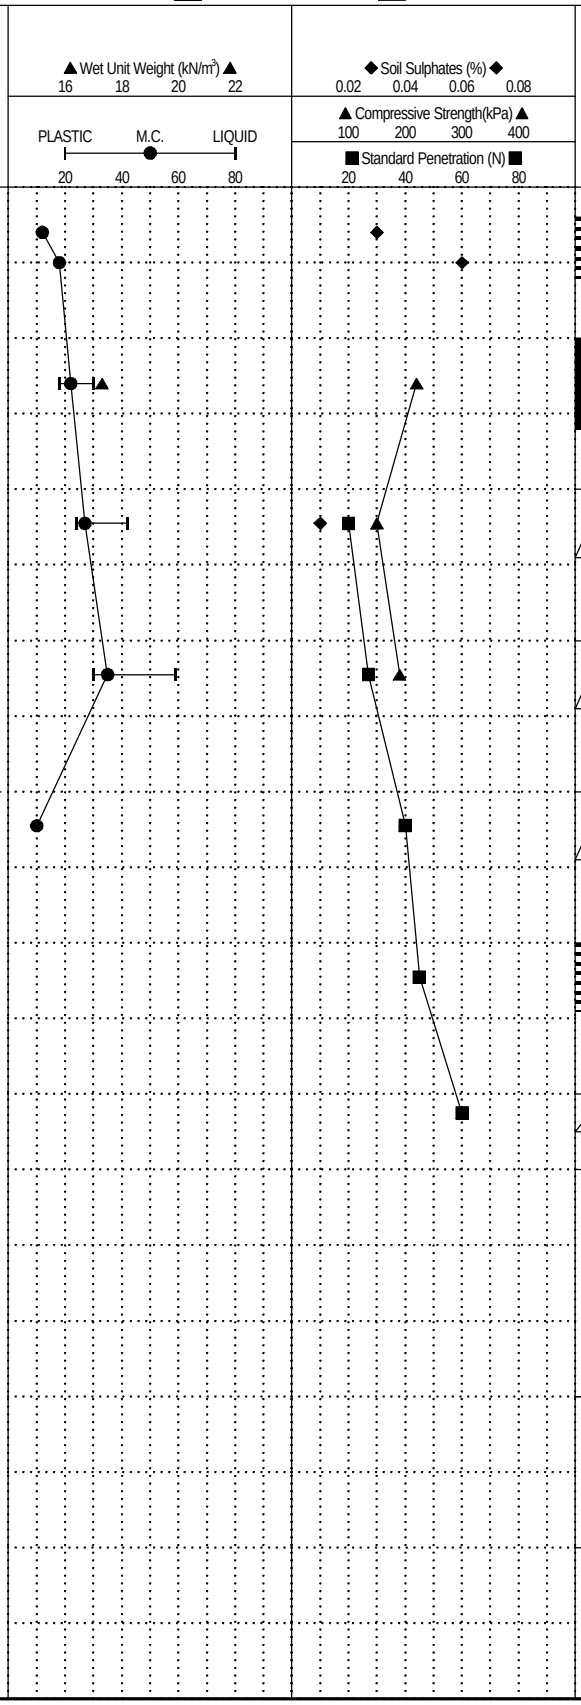


| Depth (m) | SAMPLE TYPE | SPT (N) | USC | SOIL DESCRIPTION | ELEVATION (m) |
|---|---|---|---|---|---|
| 0 | | | ASPH | ASPHALT, 40mm thick | |
| | | | GP | GRAVEL (FILL), brown, sandy, some clay | |
| | | | CL | CLAY (FILL), very stiff, grey & brown, trace gravel and sand | 123 |
| 1 | | | CI | CLAY<br>brown, silty, trace gravel and iron oxide staining, coal, partially frozen<br>- soft and wet at 1.5 m | 122 |
| 2 | | 20 | | | 121 |
| 3 | | 27 | CH | CLAY<br>brown & blue mottled, high plasticity, trace gravel | 120 |
| 4 | | 40 | SA | SAND<br>tan, trace limestone gravel, dense to very dense, fine to medium | 119 |
| 5 | | 45 | | | 118 |
| 6 | | 60/250 | LI | LIMESTONE<br>tan, highly weathered and fractured, weak | 117 |
| 7 | | | | | 116 |
| 8 | | | | | 115 |
| 9 | | | | END OF TESTHOLE AT 9.0m<br>ON COMPLETION:<br>- installed well, pneumatic piezometer, and thermistor string | 114 |
| 10 | | | | | |

THE CITY OF Edmonton

| LOGGED BY: ABC | COMPLETION DEPTH: 9.00 m |
|---|---|
| REVIEWED BY: DEF | COMPLETION DATE: 00/8/25 |
| Fig. No: 4 | Page 1 of 1 |

GEOTECH CITY OF EDMONTON.GPJ CITY OF EDMONTON.GDT 03/12/5